


# Semiflexible duct

# LFPE



## Dimensions

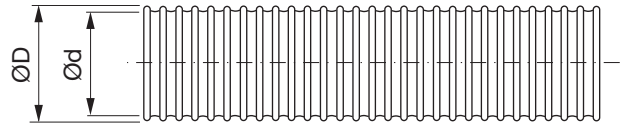

Ød nom	ØD [mm]	l mm	m [kg]/m
63	75	50000	0,25
76	90	50000	0,35

## Description

Has a corrugated outside and a smooth inner surface. Made of odorless polyethylene (PE) without and recycled material.

Inner duct with antistatic additives and has microbial properties according to EN ISO 846 A.

Ring stiffness  $\geq 8 \text{ kN/m}^2$  according to EN ISO 9969. Can be bent to a radius of minimum 150 mm.

Dimension 63 fits Lindab Safe Ø 63 mm.  
Dimension 76 fits Lindab Safe Ø 76 mm.

Use the transition piece RCFU, with Smart Lock function, to connect the LFPE 76/90-dimension to InDomo manifolds and plenum boxes with 80 mm couplings. The smart lock function allows you to fasten LFPE effortlessly


Outside/inside color: White

Delivered in coils of 50 m.

Minimum installation and use temperature:  $-5 \text{ }^\circ\text{C}$

Maximum installation and use temperature:  $+60 \text{ }^\circ\text{C}$

## Ordering example




# Semiflexible duct

# LFPE


## Technical data

### Pressure drop

#### Straight

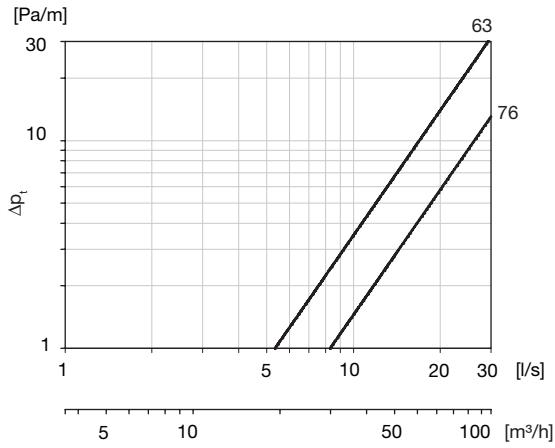

#### Bend 45° (length 0,5 m)

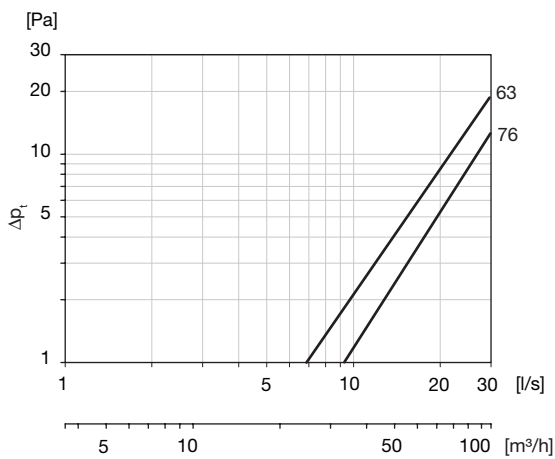

#### Bend 90° (length 0,5 m)

