
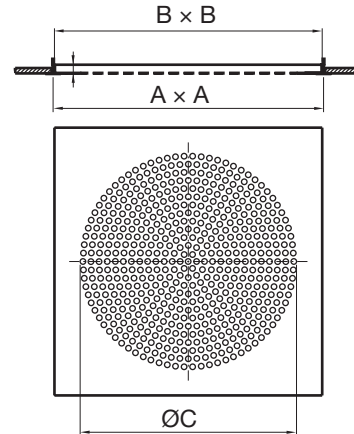


# Perforated extract plate

# PKY/PCY

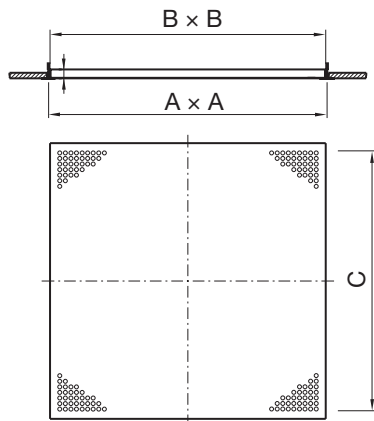

## Description

PKY/PCY is a “diffuser” without duct connection for installation in T-rail ceilings. PKY/PCY is used in situations where air is to be extracted over a suspended ceiling, and a sufficient opening is required in the ceiling for the air to pass through.

- Architecturally and financially attractive “diffuser” solution for extract of air over a suspended ceiling.
- Can be adapted for many different types of ceiling.
- Low pressure loss and large air capacity.

## Maintenance

The visible parts of the diffuser can be wiped with a damp cloth.

## Materials and finish

Material: Galvanised steel  
 Standard finish: Powder-coated  
 Standard colour: RAL 9003 or 9010, gloss 30

The diffuser is available in other colours. Please contact Lindab’s sales department for further information.

## Dimensions


### PKY

A Size	B mm	C mm	Free area m <sup>2</sup>	Curve no.	Weight kg
500	495	467	0.085	1	1.3
600	595	567	0.125	2	1.8
625	620	597	0.138	3	1.9

### PCY

A Size	B mm	C mm	Free area m <sup>2</sup>	Curve no.	m kg
500	495	400	0.043	4	1.6
600	595	490	0.064	5	2.1
625	620	490	0.064	5	2.2

## Pressure loss [P<sub>a</sub>]

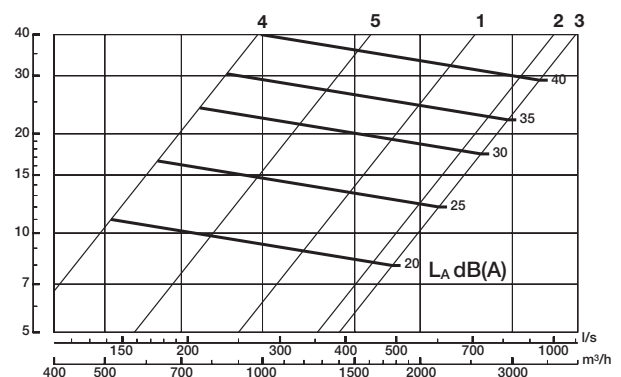

## Order code

Product **PKY/PCY** **aaa**  
 Type \_\_\_\_\_  
 Size \_\_\_\_\_  
 Ceiling system - see introductory summary.