


Relay module

FDS-RB



Dimensions (mm)

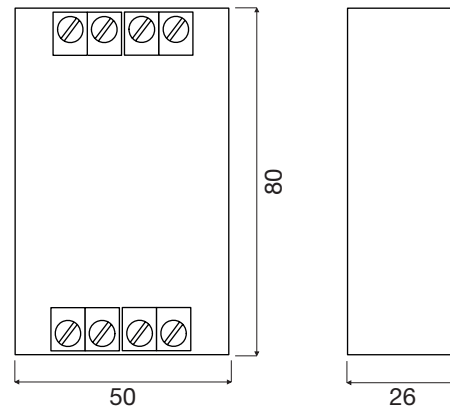

Description

FDS-B is a relay module with three closing relays (NC contact), 230 V AC, 4 A used for:

- Connect "Stop AHU" signal (DO5 on FDS-M)
- Conect External alarms (DO6 and DO7 on FDS-M)

Please, see installation guides in the FDS user manual.

Ordering example

Type **FDS-RB**

- 1
- 2
- 3
- 4
- 5
- 6
- 7
- 8
- 9
- 10
- 11
- 12
- 13
- 14
- 15
- 16
- 17
- 18


Relay module

FDS-RB

Technical data

Inputs	Three inputs, 24 V AC, from FDS-M
Relay outputs	Three closing relays, 230 V AC, 4 A
Protection class	IP00
Mounting	DIN-Rail
Cable connection	Screw terminals
CE	This product conforms with the requirements of European EMC standards CENELEC EN 61000-6-1 and EN 61000-6-3, and the requirements of European LVD standard EN 60669-2-1. It carries the CE mark.

Wiring diagram

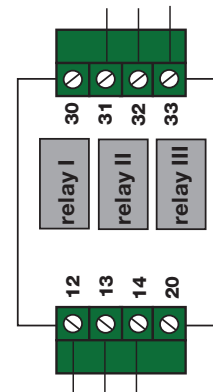

- 12 Control input relay I
- 13 Control input relay II
- 14 Control input relay III
- 20 Control input common 24 V AC
- 30 Control input 24 V AC
- 31 Output relay I
- 32 Output relay II
- 33 Output relay III

For the wiring diagram, please see installation guides in the FDS-M user manual.

1

2

3

4

5

6

7

8

9

10

11

12

13

14

15

16

17

18