


Shut-off damper

DTMU



Dimensions

DTMU

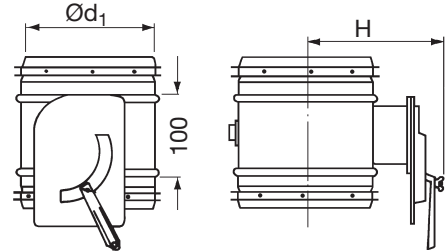

Description

DTMU are tight-closing shut-off dampers. The dampers can be used to completely shut off the air flow.

The blade consists of double sheet metal with an intermediate sealing of EPDM-rubber, which is in contact with the inside of the damper housing when in the closed position.

DTMU is equipped with a handle and a locking mechanism for stepless adjustment of 0–90° without tools.

There is a separate assembly, measuring, technical data and maintenance instruction for this product.

Ø 80–315 fullfills pressure class C in closed position.

Ø 355–630 fullfills pressure class B in closed position.

Ød ₁ nom	H [mm]	m [kg]	Sealing class past closed blade
80	95	0,80	4
100	105	0,90	4
112	110	0,90	4
125	118	1,00	4
140	125	1,00	4
150	130	1,10	4
160	135	1,10	4
180	145	1,30	4
200	155	1,40	4
224	165	1,60	4
250	180	1,90	4
280	195	2,20	4
300	205	2,40	4
315	215	2,60	4
355	240	3,10	4
400	260	3,90	4
450	285	4,50	4
500	310	5,20	4
560	340	6,20	4
600	360	7,20	4
630	375	8,10	4

Technical data

For technical data go to [LindQST](#).

Ordering example

Product	DTMU	250
Dimension Ød ₁		

