

# Mode switch


# ARCMS



## Description

Rotary mode switch with 3 positions.  
For use together with connection box ARCB.

## Dimensions

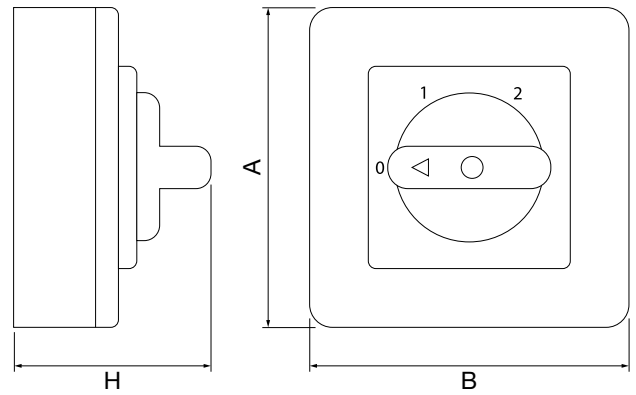

A mm	B mm	H mm	m kg
87	87	75	0,15

## Ordering example

Product **ARCMS**

## Mode switch

## ARCMS

## Technical data

<b>Main</b>	
Range	Exact
Product or component type	Rotary switch
Device application	Control
Device presentation	Mechanism with fixing frame
Switch function	3 positions
Colour	White
<b>Complementary</b>	
Technology type	Electromechanical
Wiring device mounting	Flush
Rated current	16 A
[U <sub>e</sub> ] rated operational voltage	400 V
Network type	AC
Connections - terminals	Screw terminals
Shape of screw head	Pozidriv No 1 and combi
Clamping connection capacity	1 x 1.5...2 x 2.5 mm <sup>2</sup> for solid cable(s) 1 x 1.5...2 x 2.5 mm <sup>2</sup> for solid stranded cable(s)
Material	ABS (acrylonitrile butadiene-styrene)
Standards	EN 60947 EN 60669-1
Product certifications	CE NEMKO FIMKO SEMKO
IP degree of protection	IP20 also with visual parts removed
Locking position	In off position by removing plastic
Embedding depth	23 mm
Projecting depth	38 mm